

PRODUCTS CATALOGUE

2021

Østergade 65 9560 Hadsund Telefon 70 70 76 39 info@jenslubeck.dk




Rotary harrow ANTOKS

Rotary harrow ANTOKS is an integral implement for preparing the soil for sowing, before and after seed loosening of the topsoil, destruction of the soil crust, improvement of water, air and temperature regimes of the seed layer, destruction of weed shoots in the thread stage. Due to the simplicity of the design and high-quality working components, the company guarantees long service life of the implement, even at operation in the most difficult conditions.




- The working components are discs with specially designed teeth.
- The discs are attached to the frame by spring-loaded racks.
- The technical perfection and simplicity of the machine design, especially wide usage of composite materials, ensure its reliability and durability.
- Minimum labor costs for machine maintenance.
- The use of the FKL type bearing assembly for the installation of working components significantly reduces working time for maintaining the implement in operable condition. Ensuring maximum safety for staff.
- Working width from 3 to 9 m depends on a configuration.
- It is aggregated with tractors with traction force from 30 to 105 h.p.
- Transfering to the transport position by the hydraulic system.











30-45 3 28 510 45-60 4 40 680


ĕ			is a
80-120	6	60	1350
80-120	6 ^{EKO}	50	1150

ĕ		***	KG
80-120	6 ct	50	1450
80-120	9	96	2000

Destroy the crust, cover moisture









ANTOKS in folded position








Rotary harrow ANTOKS at work

Rotary harrow ANTOKS XL

Rotary harrow ANTOKS is an integral implement for preparing the soil for sowing, before and after seed loosening of the topsoil, destruction of the soil crust, improvement of water, air and temperature regimes of the seed layer, destruction of weed shoots in the thread stage. Due to the simplicity of the design and high-quality working components, the company guarantees long service life of the implement, even at operation in the most difficult conditions.



- The working components are discs with specially designed teeth.
- The discs are attached to the frame by spring-loaded racks.
- The technical perfection and simplicity of the machine design, especially wide usage of composite materials ensure its reliability and durability.
- Minimum labor costs for machine maintenance. Ensuring maximum safety for staff.
- Working width to 18 m allows to work with high efficiency and significantly reduces the working time on the field, which is especially important during spring tillage.
- It is aggregated with tractors with traction force from 80 to 140 h.p.
- Transfering to the transport position by the hydraulic system.



130-170 180-250














Rake

12 59 3900 14 69 4500 18 89 5900

Easy transformation 3 в 1

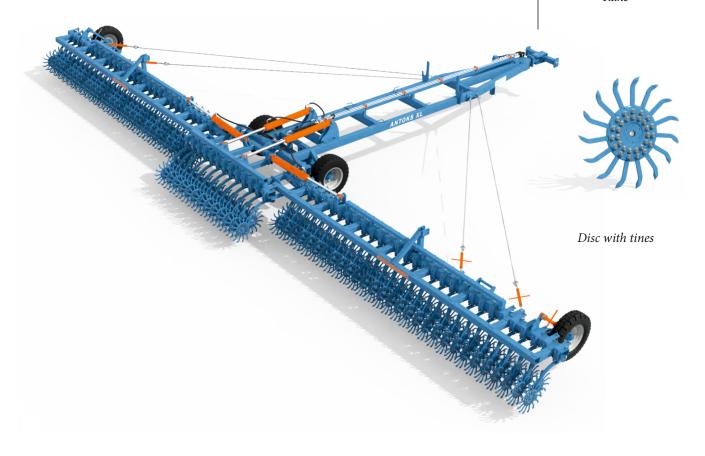

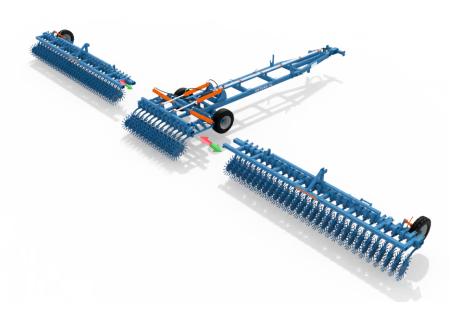







ANTOKS XL at work




Cultivator Maktiller






























Østergade 65 9560 Hadsund Telefon 70 70 76 39 info@jenslubeck.dk